CviLux


CI44 Series 1.25mm(.049") SMT Headers


- O Polarization and Low-profile
- O Locking slots provide secure mating
- © Fixed tabs provide PCB hold-down and strain-relief for SMT
- O Insulator: High temperature plastic UL 94V-0, Color Nature
- With Tin plated SMT type contact
- Mate with Cl44 housing

RoHS Compliant





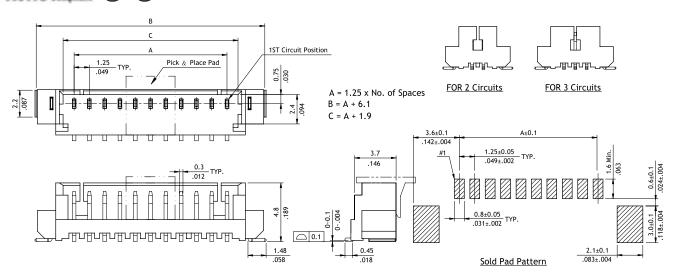

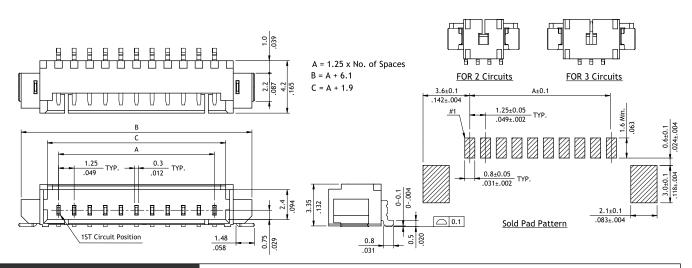

Ordering Code

① C I 4 4 0

1 5

3 4

 ${f M}$

6

B 0

0

- Series No.
- 2 No. of Circuits: 02 to 15
- 3 M = SMT type header
- 4 Plating code:
 - 1 = Tin over Nickel plated
- **5** Type: V = Top entry H = Side entry
- 6 Packing Options:
 - 00 = Tube
 - R0 = Tape & Reel
 - RP = Tape & Reel (Top entry type with pick & place Pad)
- 7 Process:
 - -LF = For Lead Free soldering process
 - -NH = For Lead Free soldering process and Halogen-Free
 - * Special options consult manufacturer